

# VAL 1/2 C CD

## LEVER Tap Range Lever Basin Taps with Ceramic Disc Valves



### Specification

<b>Style:</b>	Contemporary
<b>Product Type:</b>	Taps
<b>Finish/Colour:</b>	Chrome
<b>Main Construction Material:</b>	Brass
<b>Mount Type:</b>	Deck
<b>Handle Type:</b>	Paddle
<b>Connection Inlet:</b>	1/2" BSP
<b>Number of Tap Holes Required:</b>	2
<b>Valve/Cartridge Type:</b>	1/2" Ceramic Disc Valves
<b>Plumbing System Suitability</b>	All - Ideally balanced
<b>Working Pressure Range:</b>	Min 0.2 bar, Max 7.0 bar
<b>Maximum Hot Water Temperature: °c</b>	65
<b>Maximum Dynamic Pressure: (bar)</b>	7
<b>Maximum Static Pressure: (bar)</b>	10
<b>Flow Type:</b>	Single Flow
<b>Flow Rate: (l/min @ 3 bar)</b>	31.5
<b>Connection Outlet:</b>	
<b>Isolation Included:</b>	No

### Features:

- Supplied with 3"(76mm) metal levers
- Metal back nuts
- Chrome plated to BS EN 248

### Product Certifications:


WRAS Certificate No: 1409038



Also available in the LEVER Range is:



### Dimensions (measurements in mm)

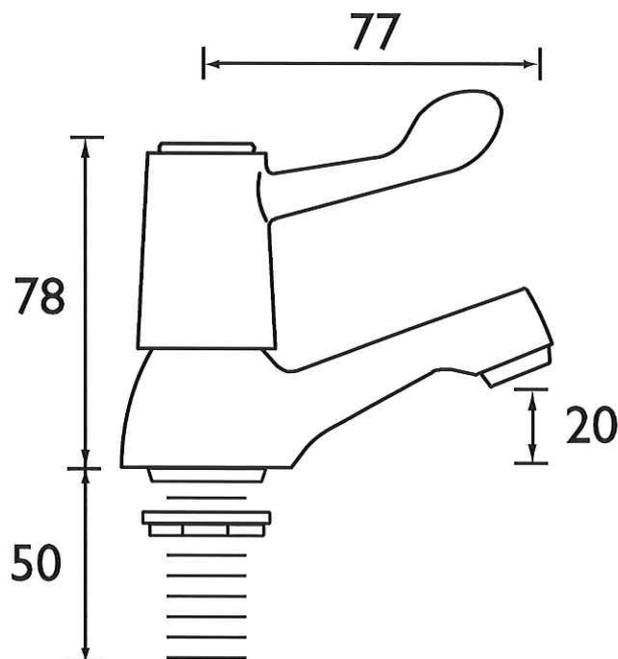

### Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
<b>VAL 1/2 C CD (Cold Supply)</b>	8.1	12.9	18.5	25.7	31.5	40.7

## TECHNICAL DATA SHEET



# BRISTAN

TAPS & SHOWERS

D6

# WRAS<sup>®</sup>

Water Regulations Advisory Scheme

*This certifies that*

**PEGLER YORKSHIRE GROUP LTD.**

*has had the undermentioned product examined, tested and found, when correctly installed, to comply with the requirements of the United Kingdom Water Supply (Water Fittings) Regulations/Scottish Water Byelaws.*

**PEG402, PEG402UA, PEG402UAX, TX402, TX402UA & T402UAX  
THERMOSTATIC BLENDING VALVES**

*This certificate by itself is not evidence of a valid WRAS Approval. Confirmation of the current status of an approval must be obtained from the WRAS Directory ([www.wras.co.uk/directory](http://www.wras.co.uk/directory))*

*The product so mentioned will be listed in the  
Water Fittings and Materials Directory  
for a period until:*

**31      MAY      2019**


**1405079**

*Certificate No.*

*Chairman, Product Approval Group*

*Secretary*

**WRAS**  
**APPROVED  
PRODUCT**

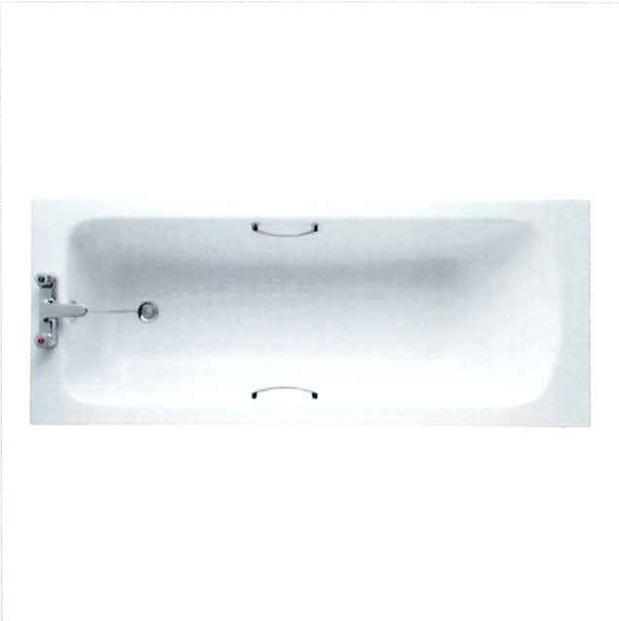

## Sandringham 21 Bath 170x70cm 2 Tapholes With Handgrips And Tread pattern

### Illustrated

- E0284** Sandringham 21 bath 170 x 70cm 2 tapholes with chrome plated handgrips and tread pattern
- B9870** Sandringham 21 bath filler 2 hole
- S1019** Sandringham 21 front bath panel 170cm
- S1020** Sandringham 21 end bath panel 70cm
- S8970** Trap 1½" plastic P with 75mm seal, multi-purpose outlet suitable for plastic and BS copper pipe
- S8830** Waste 1½" bath chain and overflow, plastic plug
- A5901** TMV Thermostatic mixing valve 22mm

### Configuration options

### Material

Idealform

### Weights

- E0284 20.00KG
- B9870 2.10KG
- S1019 3.60KG
- S1020 1.80KG
- S8970 1.00KG
- S8830 1.78KG
- A5901 1.70KG

### Colours

White (01)

### Standards


Constructed to EN 198:2008. EN 14516

### Special Notes

Frame and supports inclusive.

### Capacity

174 litres (to overflow)

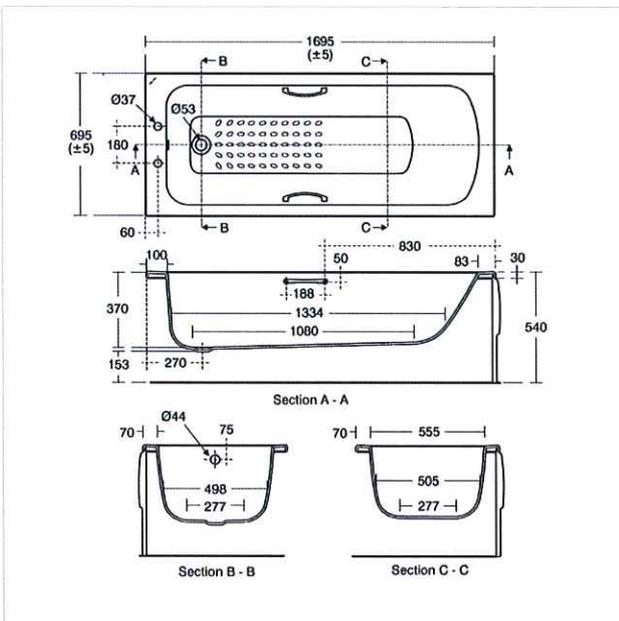

### Frequently used applications

- Hotels
- Residential

### Features

Water Saving

### Accreditations

Water Label



Email: [info@idealspec.co.uk](mailto:info@idealspec.co.uk)  
 Tel: 0870 122 8822  
 Fax: 0870 122 8282  
 Web: [www.idealspec.co.uk](http://www.idealspec.co.uk)



Sandringham 21 Washbasin 55cm 2 Tapholes

ILLUSTRATED

- E8951** Sandringham 21 washbasin 55cm, 2 tapholes, with overflow and chainstay hole
- E8976** Sandringham 21 pedestal
- B9865** Sandringham 21 Washbasin Pillar Taps
- S8800** Waste 1¼" plastic waste with bead chain and plug, 80mm slotted tail, bolt stay
- S8950** Trap 1¼" plastic P for use with cloakroom pedestal

OPTIONS

- E0157** Wall fixing set

ILLUSTRATED PRODUCT DETAILS

Sizes

**E8951** w:550 x d:460

Weights

- E8951** 16.00 KG
- E8976** 10.28 KG
- B9865** 1.05 KG
- S8800** 0.08 KG
- S8950** 1.00 KG

Materials

- E8951** Vitreous China
- E8976** Vitreous China
- B9865** Chrome Plated Brass
- S8800** Chrome Plated Plastic
- S8950** Plastic

Finishes

- E8951**  White (01)
- E8976**  White (01)
- B9865**  Chrome (AA)
- S8800**  Chrome (AA)
- S8950**  Neutral / No Finish (67)

Flow rates


**B9865** 13 Litres per minute @ 3 bar pressure

Standards

Vitreous china to BS 3402. Washbasin to BS EN 14688 & BS EN 31

Special Notes

Washbasin wall mounted using E0157 wall fixing set or full pedestal mounted using 2 screws through back of basin (not supplied).

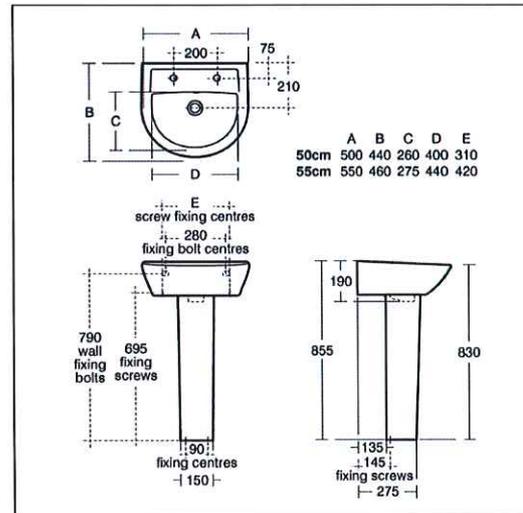

## Sandringham 21 Close Coupled WC Suite- Push Button

### ILLUSTRATED

- E8963** Sandringham 21 close coupled WC pan with horizontal outlet
- E8967** Sandringham 21 Close Coupled 4/2.6 litre dual flush valve, bottom supply and internal overflow
- E1316** Seat and cover, normal close
- S9101** Domex screws (pair)

### OPTIONS

- E8966** Sandringham 21 Close Coupled 6/4 litre dual flush valve, bottom supply and internal overflow
- S2985** Sandringham 21 seat and cover, slow close
- E1317** Sandringham 21 seat and cover, metal hinges, normal close
- E1319** Sandringham 21 seat no cover, metal hinges, normal close
- S4305** Panekta outlet Connector, finned pattern to convert horizontal outlet WCs to P trap
- S4300** Panekta outlet Connector, finned pattern to convert horizontal outlet WCs to S or turned P trap

### ILLUSTRATED PRODUCT DETAILS

#### Weights

- E8963** 17.30 KG
- E8967** 15.50 KG
- E1316** 2.17 KG
- S9101** 0.22 KG

#### Materials

- E8963** Vitreous China
- E8967** Vitreous China
- E1316** Plastic
- S9101** Metal

#### Finishes

- E8963**  White (01)
- E8967**  White (01)
- E1316**  White (01)
- S9101**  White (01)

#### Capacity


- E8967** 4 litres

#### Standards

Vitreous china to BS 3402

#### Special Notes

WC screwed to floor and cistern screwed to wall (not supplied).

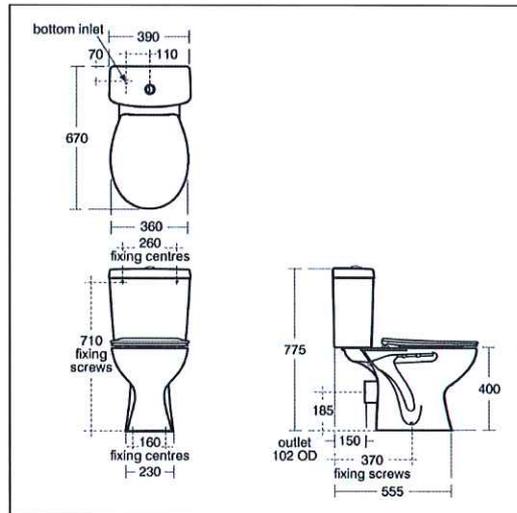

### FEATURES



# VAL 1/2 C CD

## LEVER Tap Range Lever Basin Taps with Ceramic Disc Valves



### Specification

<b>Style:</b>	Contemporary
<b>Product Type:</b>	Taps
<b>Finish/Colour:</b>	Chrome
<b>Main Construction Material:</b>	Brass
<b>Mount Type:</b>	Deck
<b>Handle Type:</b>	Paddle
<b>Connection Inlet:</b>	1/2" BSP
<b>Number of Tap Holes Required:</b>	2
<b>Valve/Cartridge Type:</b>	1/2" Ceramic Disc Valves
<b>Plumbing System Suitability</b>	All - Ideally balanced
<b>Working Pressure Range:</b>	Min 0.2 bar, Max 7.0 bar
<b>Maximum Hot Water Temperature: °c</b>	65
<b>Maximum Dynamic Pressure: (bar)</b>	7
<b>Maximum Static Pressure: (bar)</b>	10
<b>Flow Type:</b>	Single Flow
<b>Flow Rate: (l/min @ 3 bar)</b>	31.5
<b>Connection Outlet:</b>	
<b>Isolation Included:</b>	No

### Features:

- Supplied with 3"(76mm) metal levers
- Metal back nuts
- Chrome plated to BS EN 248

### Product Certifications:


WRAS Certificate No: 1409038



Also available in the LEVER Range is:



### Dimensions (measurements in mm)

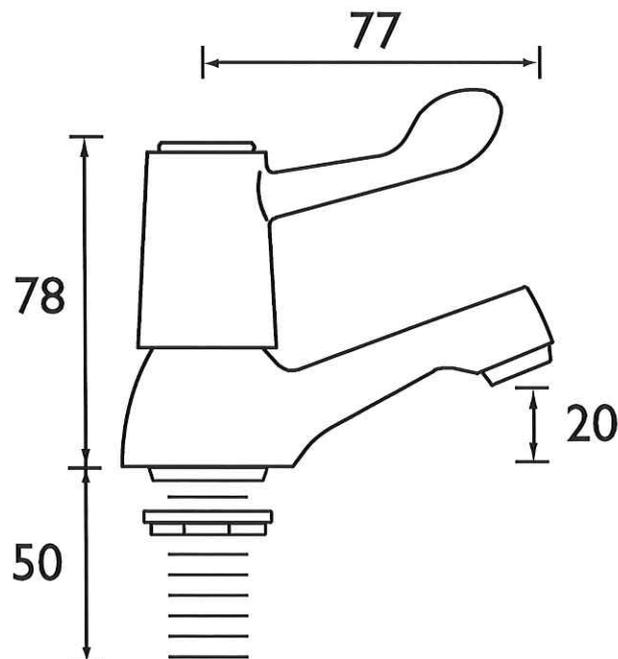

### Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
<b>VAL 1/2 C CD (Cold Supply)</b>	8.1	12.9	18.5	25.7	31.5	40.7

**TECHNICAL  
DATA  
SHEET**



**BRISTAN**  
TAPS & SHOWERS

D6





# WRAS

Water Regulations Advisory Scheme

*This certifies that*

**PEGLER YORKSHIRE GROUP LTD.**

*has had the undermentioned product examined, tested and found, when correctly installed, to comply with the requirements of the United Kingdom Water Supply (Water Fittings) Regulations/Scottish Water Byelaws.*

**PEG402, PEG402UA, PEG402UAX, TX402, TX402UA & T402UAX  
THERMOSTATIC BLENDING VALVES**


*This certificate by itself is not evidence of a valid WRAS Approval. Confirmation of the current status of an approval must be obtained from the WRAS Directory ([www.wras.co.uk/directory](http://www.wras.co.uk/directory))*

*The product so mentioned will be listed in the  
Water Fittings and Materials Directory  
for a period until:*

**31      MAY      2019**

**1405079**

*Certificate No.*

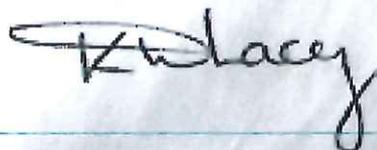

*Chairman, Product Approval Group*



*Secretary*

**WRAS**  
APPROVED  
PRODUCT

# VAL BSM C CD

**VALUE Tap Range**  
Lever Bath Shower Mixer with  
Ceramic Disc Valves Chrome



## Features:

- Supplied with 3" (76mm) metal levers
- Supplied with metal back nuts
- Chrome plated to BS EN 458
- Supplied with 1.5m hose, handset and wall bracket

## Product Certifications:



WRAS Certificate No: 1708700  
WRAS Expiry Date: 31/08/2022




For more products, visit our website:  
<http://www.bristan.com>



## Specification

<b>Style:</b>	Contemporary
<b>Product Type:</b>	Bathroom Taps
<b>Finish/Colour:</b>	Chrome
<b>Main Construction Material:</b>	Brass
<b>Mount Type:</b>	Deck Mounted
<b>Handle Type:</b>	Lever
<b>Connection Inlet:</b>	3/4" BSP
<b>Connection Outlet:</b>	N/A
<b>Number of Tap Holes:</b>	2
<b>Valve/Cartridge Type:</b>	3/4" Ceramic Disc Valves
<b>Plumbing System Requirements:</b>	All - Ideally balanced
<b>Working Pressure Range:</b>	Min 0.2 bar, Max 5.0 bar
<b>Maximum Hot Water Temperature: °C</b>	65
<b>Maximum Dynamic Pressure: (bar)</b>	5
<b>Maximum Static Pressure: (bar)</b>	10
<b>Flow Type:</b>	Single
<b>Flow Rate: (l/min @ 3 bar)</b>	56.9
<b>Isolation Included:</b>	No

## Dimensions (measurements in mm)

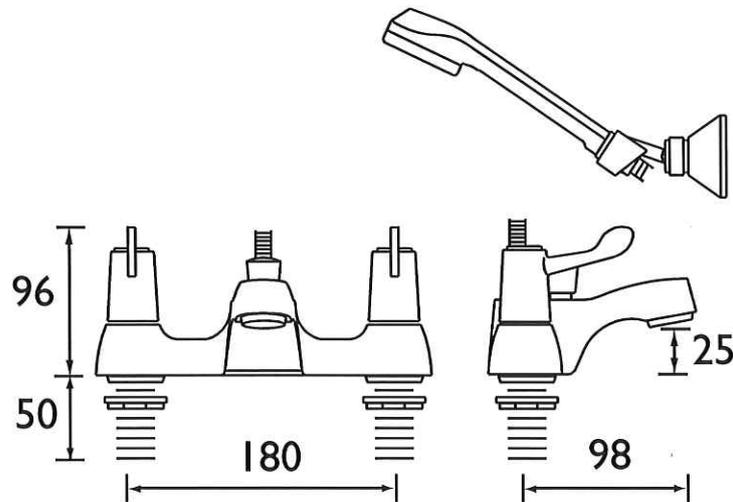

**1500mm Hose, Handset & Wall Bracket**

## Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
VAL BSM C CD	14.6	23.2	33.4	46.4	56.9	73.4
VAL BSM C CD - Handset	4.2	6.7	9.5	13.4	16.5	21.3

TECHNICAL  
DATA  
SHEET



**BRISTAN**  
TAPS & SHOWERS D8